


# EFFER 470



4S




5S

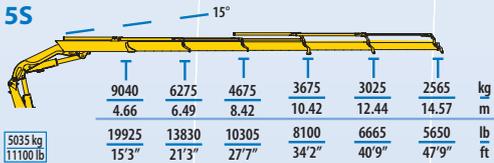

6S



7S

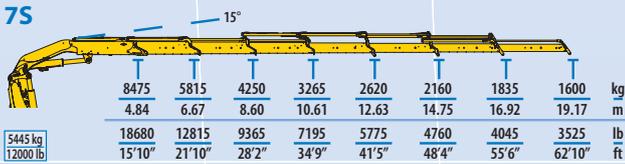

## Standard



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	42,77	∞	2430	2550	1285	7830	26
5S	42,13	∞	2430	2550	1475	7830	26
6S	41,63	∞	2430	2550	1285	7830	26
7S	41,02	∞	2430	2550	1475	7830	26

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	309460	∞	96	100	51	308	57300
5S	304830	∞	96	100	58	308	57300
6S	301210	∞	96	100	51	308	57300
7S	296800	∞	96	100	58	308	57300

## 8S




## 5S+JIB 3S




## 5S+JIB 4S



## 5S+JIB 6S

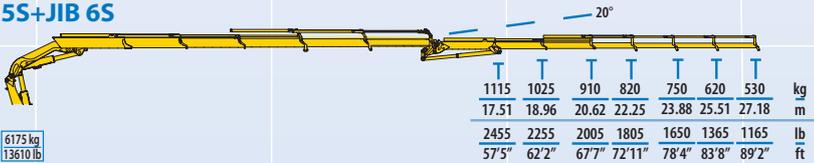

## 6S+JIB 3S LIGHT

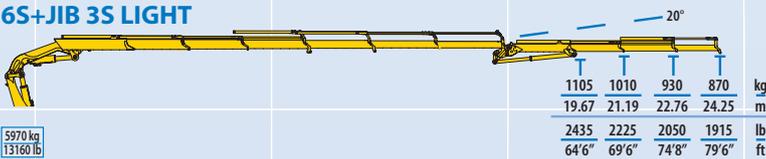

## 6S+JIB 3S HEAVY DUTY



## Optional



MODEL							
8S	40,42	∞	2470	2550	1415	7830	26
5S+JIB 3S	42,13	∞	2570	2550	1475	7830	26
5S+JIB 4S	42,13	∞	2570	2550	1475	7830	26
5S+JIB 6S	42,13	∞	2570	2550	1475	7830	26
6S+JIB 3S LIGHT	41,63	∞	2660	2550	1475	7830	26
6S+JIB 3S HD	41,63	∞	2570	2550	1475	7830	26

MODEL							
8S	292460	∞	97	100	56	308	57300
5S+JIB 3S	304830	∞	101	100	58	308	57300
5S+JIB 4S	304830	∞	101	100	58	308	57300
5S+JIB 6S	304830	∞	101	100	58	308	57300
6S+JIB 3S LIGHT	301210	∞	105	100	58	308	57300
6S+JIB 3S HD	301210	∞	101	100	58	308	57300

## 6S+JIB 4S LIGHT




6035 kg  
13300 lb

## 6S+JIB 4S HEAVY DUTY



6180 kg  
13620 lb

## 6S+JIB 6S HEAVY DUTY

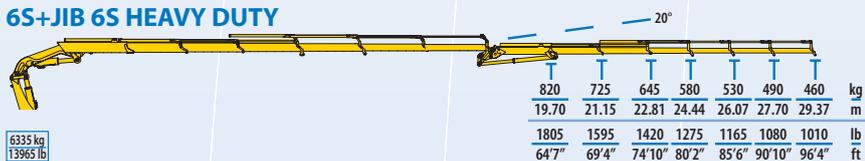

6335 kg  
13965 lb

MODEL							
	t/m	(°)	mm	mm	mm	mm	t
6S+JIB 4S LIGHT	41,63	∞	2660	2550	1475	7830	26
6S+JIB 4S HD	41,63	∞	2570	2550	1475	7830	26
6S+JIB 6S HD	41,63	∞	2570	2550	1475	7830	26

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S+JIB 4S LIGHT	301210	∞	105	100	58	308	57300
6S+JIB 4S HD	301210	∞	101	100	58	308	57300
6S+JIB 6S HD	301210	∞	101	100	58	308	57300